



Working together.  
Protecting lives.



**mass**  
MULTI APPLICATIONAL SAFETY SYSTEM

**M.A.S.S. is specially designed to self stabilise when an errant vehicle drives on to the base units of the system, helping to protect the workforce and vehicle occupant.**


The high visibility base units are not fixed to the road; anchorage is achieved at the terminal points with a steel buffer filled with sandbags. No coring or drilling into the road is necessary.

The relatively light weight and favourable shape of M.A.S.S. makes storing, transporting and handling straightforward. 160–200 metres of M.A.S.S. can be delivered to site, pallet packed on a single vehicle.

M.A.S.S. is extremely quick and easy to assemble due to its unique plug-in section. Maximum safety is achieved together with a minimum of traffic-flow disruption during assembly.

The steel M.A.S.S. base unit provides the foundation for M.A.S.S. 1 and the four additional guard elements. These guard elements can be interchanged without having to replace or purchase new base units.

\*M.A.S.S 1 is tested to T2/W5.

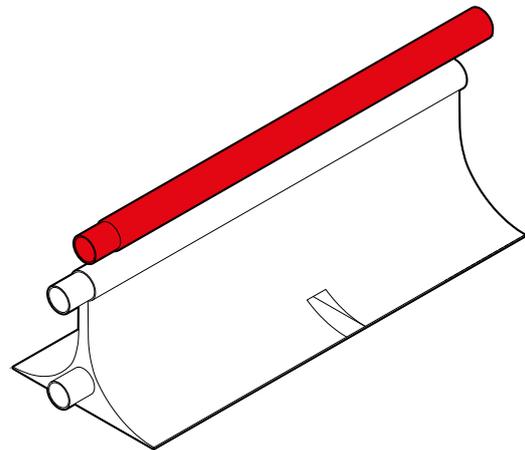


### Features and Benefits

- Interchangeable top sections
- Roll-on roll-off stability for vehicles
- Linked steel base units
- Anti-vandalism design
- High visibility




## Specifications

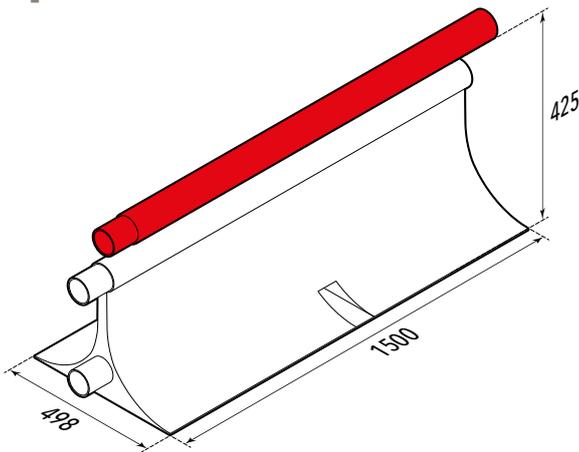


### M.A.S.S. 1

A high visibility safety solution, M.A.S.S. 1 has been fully tested to T2 W5 providing protection to work force, vehicle drivers, as well as pedestrians. Requires ramp down terminal end units.




### Pedestrian Guard

Pedestrian Guard is a vandal proof steel security fence ideal for routing pedestrians across works areas. With minimal wind loading it is ideal for air-side airport works as well as events and within the rail industry.




### Visirail

Visirail combines the benefits of Pedestrian Guard with a high visibility steel security rail. Complying with chapter 8 of the 'Traffic Sign Manual'.



### Siteguard

An anti-climb, galvanised steel mesh fencing. Siteguard offers high security for the site, workers and equipment. Gates are also available.



### Screenguard

A hoarding panel for use on work sites where privacy is required. The high steel screen offers security combined with easy assembly in a range of situations.

Containment level	T2
Working Width	W5
Standard Construction	Simple assembly. Base units are not fixed to the road; anchorage is achieved at the terminal points with a steel buffer filled with sandbags. No coring or drilling into the road is necessary.
T2 W5 Construction	As above plus anchoring pins. Requires ramp down terminal end units.
Dimensions L x W x H	1500 x 498 x 425 mm
Weight/element	55 kg
Pcs/truck (24t)	160–200 metres of M.A.S.S. can be delivered to site, pallet packed on a single vehicle.
Curve radius	Accommodates 90° Bends



©SW1 Ltd. - 15966 - www.sw1.co.uk